


# 25-800

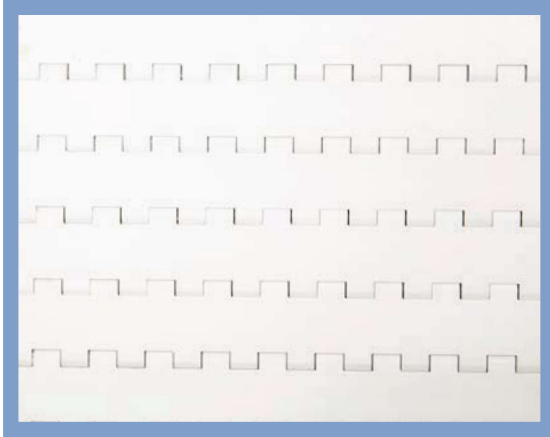

- ➔ Belt surface: Flat top.
- ➔ Open area: Closed.
- ➔ Strength: An ideal choice for light transportation.
- ➔ Material: PE, PP, POM.
- ➔ Accessories: 25 and 50 mm flights. 25 and 50 mm side guards. Friction modules.
- ➔ Application: Red meat, vegetables, seafood, fruit, snacks and bakeries.

### HUB SPECIFICATION

	Number of teeth		
	6Z	12Z	20Z
Round bore (mm)	20ø	20ø 25ø 30ø 40ø	25ø 30ø 40ø
Square bore (mm)		40x40	40x40 60x60

bore available in inch size


### BELT DATA

Materials	Max. belt pull kg/m of width	Belt weight kg/m <sup>2</sup>
Polyethylene (PE)	550	5
Polypropylene (PP)	650	5
Polyacetal (POM)	1050	7.5

### SPROCKET DATA

No. of teeth Z	A=Outside diameter (mm)	B=Pitch diameter (mm)	C=Inside diameter (mm)	Sprocket width (mm)
6	59	50	41	20
12	106	97	88	38
20	170	161	152	38

EASY TO CLEAN

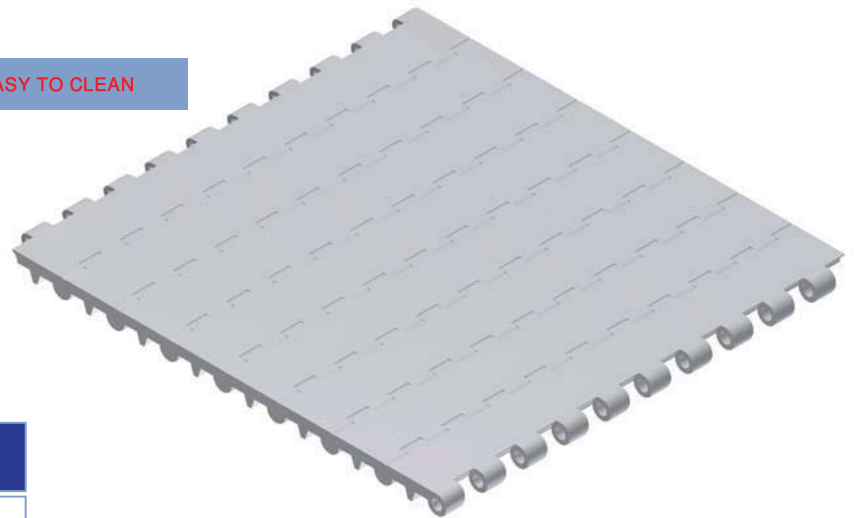

1:1

