


25-806

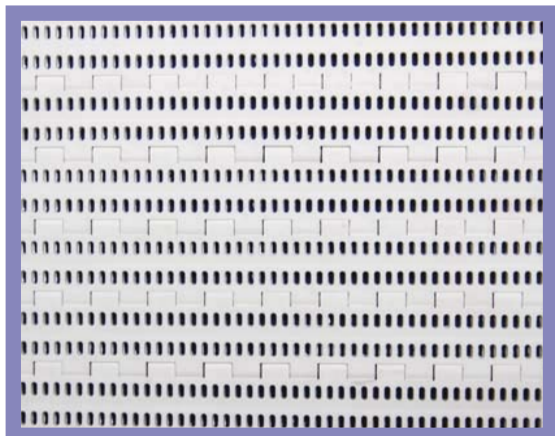

- ➔ Belt surface: Perforated flat top.
- ➔ Open area: 17%. Biggest opening 2 x 5 mm.
- ➔ Strength: An ideal choice for light transportation.
- ➔ Material: PE, PP, POM.
- ➔ Accessories: 25 and 50 mm flights.
25 and 50 mm side guards.
Friction moduls
- ➔ Application: Seafood, dairy, vegetables, poultry, snacks, sweet goods...

HUB SPECIFICATION

	Number of teeth		
	6Z	12Z	20Z
Round bore (mm)	20ø	20ø 25ø 30ø 35ø 40ø	30ø 40ø
Square bore (mm)		38.1x38.1 40x40	40x40


bore available in inch size

BELT DATA


Materials	Max. belt pull kg/m of width	Belt weight kg/m ²
Polyethylene (PE)	550	5.5
Polypropylene (PP)	650	5.5
Polyacetal (POM)	1050	8

SPROCKET DATA

No. of teeth Z	A=Outside diameter (mm)	B=Pitch diameter (mm)	C=Inside diameter (mm)	Sprocket width (mm)
6	59	50	41	20
12	106	97	88	38
20	170	161	152	38

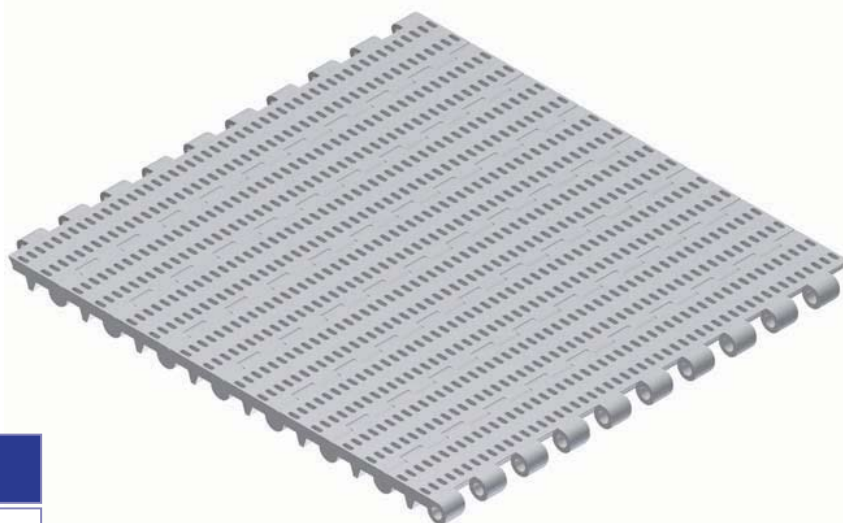

EASY TO CLEAN

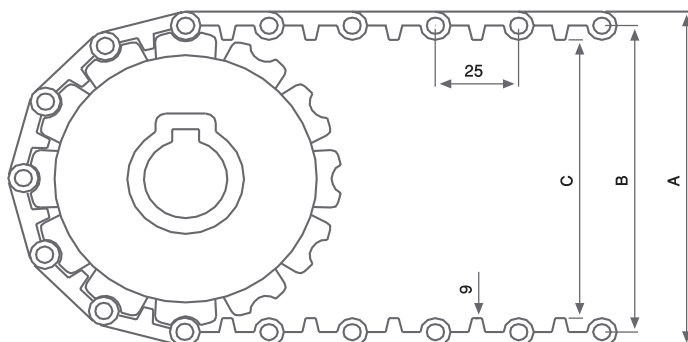

Maine Industrial Plastics and Rubber Corporation

21 Teague Street - PO Box 381 - Newcastle, ME 04553

Phone: (207) 563-5532 Email: HGL@TIDEWATER.NET FAX: (207) 563-8457