


# 12-406



- ➔ Belt surface: Open belt with a smooth surface.
- ➔ Open area: 8%. Biggest opening 4x2.5 mm
- ➔ Strength: Ideal choice for light transportation.
- ➔ Material: PE, PP, POM.
- ➔ Application: Cooling belt for small nose bar/transfer.

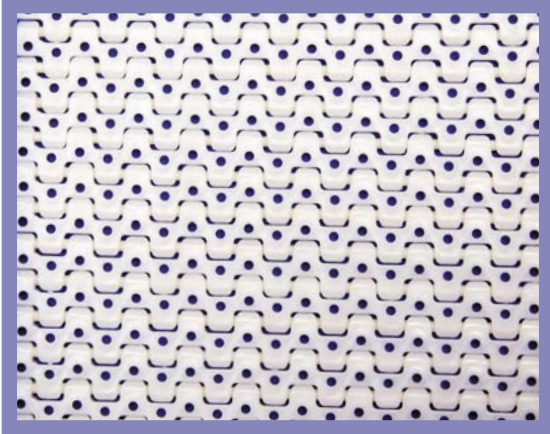

### HUB SPECIFICATION

	Number of teeth			
	10Z	19Z	24Z	28Z
Round bore (mm)	20ø	20ø	20ø	
		25ø	25ø	25ø
		30ø		30ø
Square bore (mm)		25x25	25x25	25x25
		40x40	40x40	40x40

bore available in inch size

### BELT DATA


Materials	Max. belt pull kg/m of width	Belt weight kg/m
Polyethylene (PE)	600	4.5
Polypropylene (PP)	800	4.5
Polyacetal (POM)	1450	6

### SPROCKET DATA

No. of teeth Z	A=Outside diameter (mm)	B=Pitch diameter (mm)	C=Inside diameter (mm)	Sprocket width (mm)
10	50	42	33	8
19	84	76	67	12
24	104	96	87	12
28	120	112	103	12



1:1

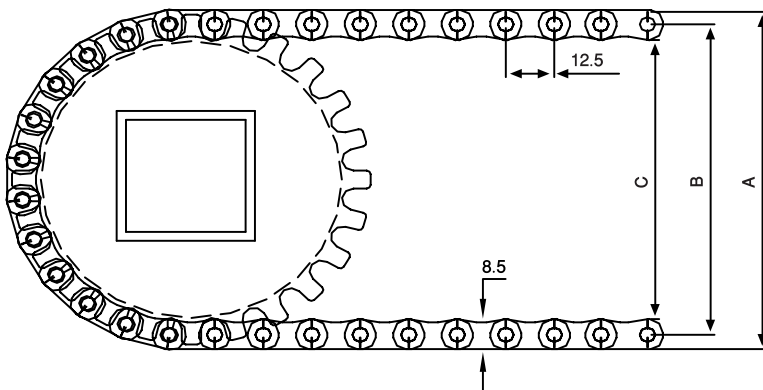

Maine Industrial Plastics and Rubber Corporation

21 Teague Street - PO Box 381 - Newcastle, ME 04553

Phone: (207) 563-5532 Email: HGL@TIDEWATER.NET FAX: (207) 563-8457