


# 50-806

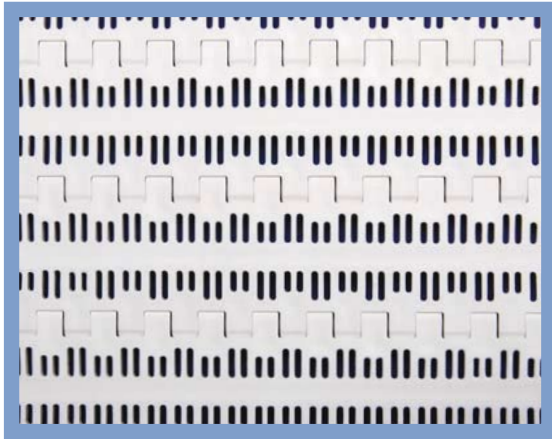

- ➔ Belt surface: Open belt with a smooth surface.
- ➔ Open area: 20%. Biggest opening 2.5\*11 mm.
- ➔ Strength: The right belt for medium-heavy transportation.
- ➔ Material: PE, PP, POM.
- ➔ Accessories: 25, 50, 75 and 100 mm flights.  
70 and 150 mm supported flights.  
50, 75 and 100 mm side guards.
- ➔ Application: Medium-heavy duty transportation, Dairy, Vegetables, poultry, snacks, sweet goods and other industries that handle products requiring drainage and small opening.

### HUB SPECIFICATION

	Number of teeth			
	6Z	8Z	10Z	12Z
Round bore (mm)	20ø			
	25ø	25ø	25ø	25ø
	30ø	30ø	30ø	30ø
	40ø	40ø	40ø	40ø 50ø 60ø
Square bore (mm)	25x25	25x25	25x25	25x25
	40x40	40x40	40x40 60x60	40x40 60x60

bore available in inch size



### BELT DATA

Materials	Max. belt pull kg/m of width	Belt weight kg/m <sup>2</sup>
Polyethylene (PE)	1200	8
Polypropylene (PP)	1400	8
Polyacetal (POM)	2060	12

### SPROCKET DATA

No. of teeth Z	A=Outside diameter (mm)	B=Pitch diameter (mm)	C=Inside diameter (mm)	Sprocket width (mm)
6	108	89	73	20
8	142	122	106	35
10	176	156	140	35
12	209	189	173	35



1:1

