


MIPR
CORPORATION

FABSYN
FOOD GRADE BELTING




FDA APPROVED
Custom Cleated Food Belts

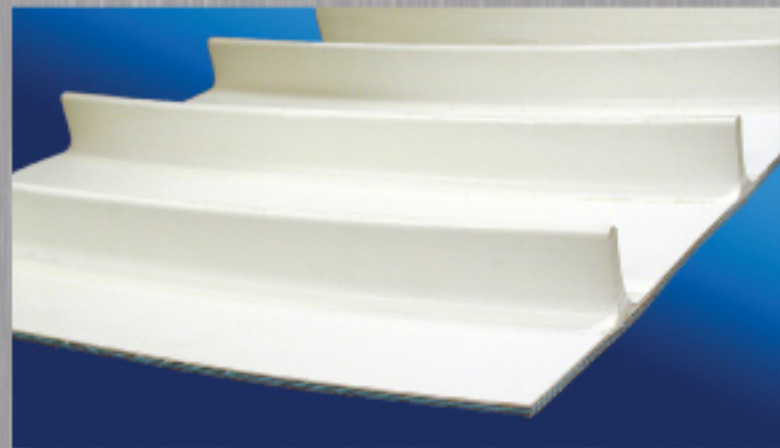

Strong And Versatile For ANY Food Handling Application

FABSYN SPECIAL PROFILES

MOLDED AND CURED IN ONE OPERATION

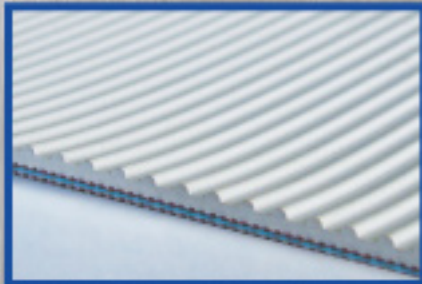

Corrugated™

- Rounded Ribs, 1/16" high on 1/4" spacing, center to center.
- Designed to provide positive discharge for sliced and diced food products.



Asendor™

- Ribs 1/8" high on 1" spacing.
- Designed for incline conveying of small and medium sized food products.
- Ribs rounded for more resistance to wear and abrasion; and less product bruising.
- Special rib design reduces resonance on return idlers.



Top Flight™

- Lateral cleats 3/16" high on 6" centers.
- Longitudinal cleats 3/16" high on 4" centers.
- Raised buttons at corners of pattern allow for drainage of wet product.
- Operates like a flat belt.
- Replaces other cleated belts or flat belts where roll-back is a problem.
- Patented design, runs on all types of conveyors without special idlers.



Crosstop™

- Cleats 3/8" x 3/8" taper down to 1/4".
- Pattern provides constant belt support from the conveyor return idlers – runs as smooth and effortlessly as a flat belt.
- No special return idlers required.
- Open 8" x 8" pattern allows water drainage and ease of cleaning.

Fabsyn Special Profile Belts On Heavy-Duty Synthetic Fabric

Belt Description	Covers	Oil Resistant	Total Belt Thickness	Wt. Per Sq. Ft.	Temp. Range F	Min. Pulley Dia. Inches	Fasteners Flexco	Fasteners Clipper	Working Strength PIW
2-Ply FABSYN COS Corrugated	1/32" x FS	Excellent	3/16"	.82 lbs.	0°/220°	2	62 or 7	1 or 2	100 lbs.
2-Ply FABSYN COS Asendor	1/32" x FS	Excellent	1/4"	.82 lbs.	0°/220°	2	62 or 7	1 or 2	100 lbs.
2-Ply FABSYN COS Top Flight	3/64" x FS	Excellent	5/16"	1.14 lbs.	0°/220°	4	62	2	100 lbs.
2-Ply FABSYN COS Crosstop	3/64" x FS	Excellent	1/2"	1.14 lbs.	0°/220°	3	62	2	100 lbs.

FABSYN CLEATED BELTS

INTEGRALLY MOLDED – AND IN STOCK

Fabsyn Food Grade Belts Are Conveniently Stocked In Five Standard Specifications.



Fabsyn 100: Integrally molded 1-1/2" x 3/8" cleats on 12" centers.



Fabsyn 150: 2-1/2" x 3/8" molded cleats on 12" centers.

Fabsyn Cleated Belts: In Stock for Immediate Delivery.

Manufactured with synthetic fabric and oil-resistant nitrile covers and cleats. Temperature range from 0° to 220° F.


One-Piece Construction

Cover, cleats and belt are molded in one operation 48 inches wide and cut to desired widths.

FDA Approved.

No Odor or Taste Transfer.
Specially Compounded to Achieve Maximum Resistance To:

- Staining
- Cleaning Solutions
- Oil
- Abrasion or Cracking
- Temperature Extremes

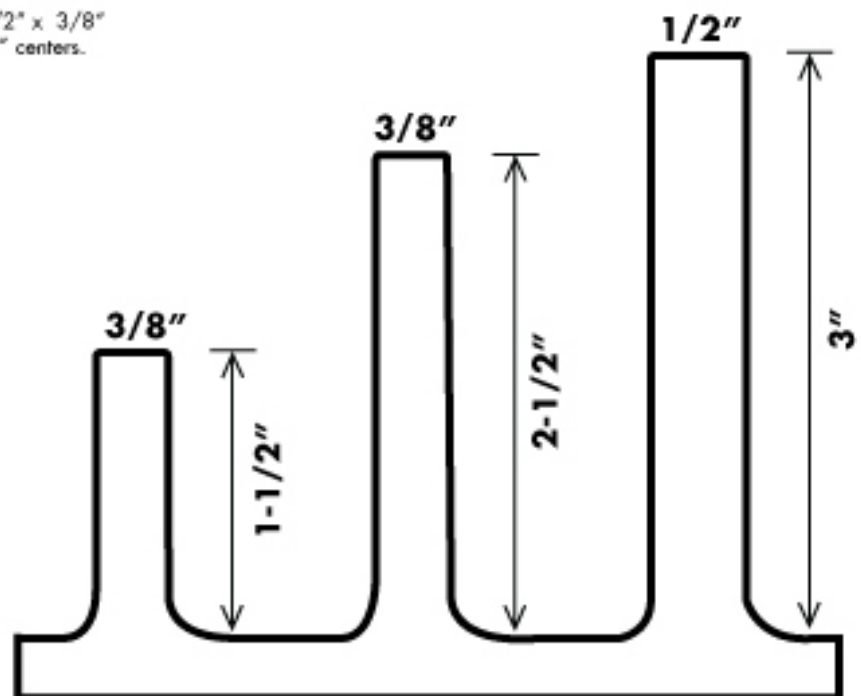

STOCK CLEAT OPTIONS

In-Stock 100 and 150 Series Cleated Belts

	Style / Color	Covers	Cleat Height And Thickness	Centers (Inches)	Min. Pulley Diameter	Working Strength PIW
FABSYN 100 SERIES	White	3/64" x FS	1-1/2" x 3/8"	12	4	100
	White	3/64" x FS	2-1/2" x 3/8"	12	4	100
FABSYN 150 SERIES	White	3/64" x FS	1-1/2" x 3/8"	12	4	150
	White	3/64" x FS	2-1/2" x 3/8"	12	4	150
	White	3/64" x FS	3" x 1/2"	12	8	150

FABSYN CUSTOM BELTING

BELT FABRICATIONS TO YOUR SPECIFICATIONS

Cleats

Cleat thicknesses of 3/8" (SD), 1/2" (MD), 5/8" (HD) or more are available on Fabsyn 100 or 150 in any height from 1/4" to 3" (straight or scoop).

- Recessed Cleats
- Cleat Notching
- Cleat Shaping
- Cleat centers of 4", 4-3/4", 6", 8", 9", 12", 16", 18" and 24"

Scoop Cleats

- Integrally molded.
- Manufactured to customer's specifications.
- Typical forward pitch is 30° with heights of 2" to 2-7/8".

V-Guides

- A, B, C, or D Sections

Belt Lacing & Splicing

- Mechanical fasteners to customer specifications.
- Belts can be made with prepared ends for field splicing or manufactured endless.

Vanner Edges


- Straight edge thicknesses of 3/8" with heights of 1/2", 3/4", 1" or 1-1/2".
- Sloped edges in heights of 1/2" and 1".




Cleat Side View




Scoop Cleat Side View

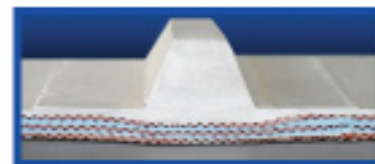

V-guide Side View



Straight Edge Vanner



Sloped Edge Vanner

Fabsyn Custom Cleats

Fabsyn can be customized with cleats, v-guides or vanner edges on the following belt stock*:

- 2-Ply Fabsyn 100 3/64" x FS
- 3-Ply Fabsyn 150 3/64" x FS

Maine Industrial Plastics and Rubber Corporation
21 Teague Street - PO Box 381 - Newcastle, ME 04553

Phone: (207) 563-5532 Email: info@miprcorp.com FAX: (207) 563-8457