

# RESISTANCE CHART

FABRIC	Resistance to Abrasion	Resistance to Phosphates	Resistance to Hydraulic Fluid	Resistance to Acid	Resistance to Oil	Resistance to Moisture	Dielectric Strength	Oil Wicking	Heat Degradation	Temperature Range	Longevity
Neoprene Coated Nylon	Excellent	Poor	Good	Good	Good	Excellent	Very Good	Excellent	Very Good	-65F to 250F	Very Good
Neoprene Coated Fiberglass	Excellent	Poor	Good	Good	Good	Excellent	Good	Fair	Very Good to Excellent	-65F to 250F	Very Good
Buna-N Coated Nylon	Very Good	Poor	Fair	Good	Good	Excellent	Poor	Excellent	Good	-65F to 250F	Poor
Silicone Coated Fiberglass	Poor	Good	Poor	Fair	Poor	Excellent	Good	Good	Excellent	-100F to 500F	Poor
Hypalon Coated Nylon	Excellent	Fair	Good	Very Good	Good	Excellent	Excellent	Excellent	Good	-65F to 325F	Excellent
Teflon® Coated Fiberglass	Excellent	Excellent	Excellent	Good	Excellent	Excellent	Excellent	Excellent	Excellent	-40F to 500F	Excellent

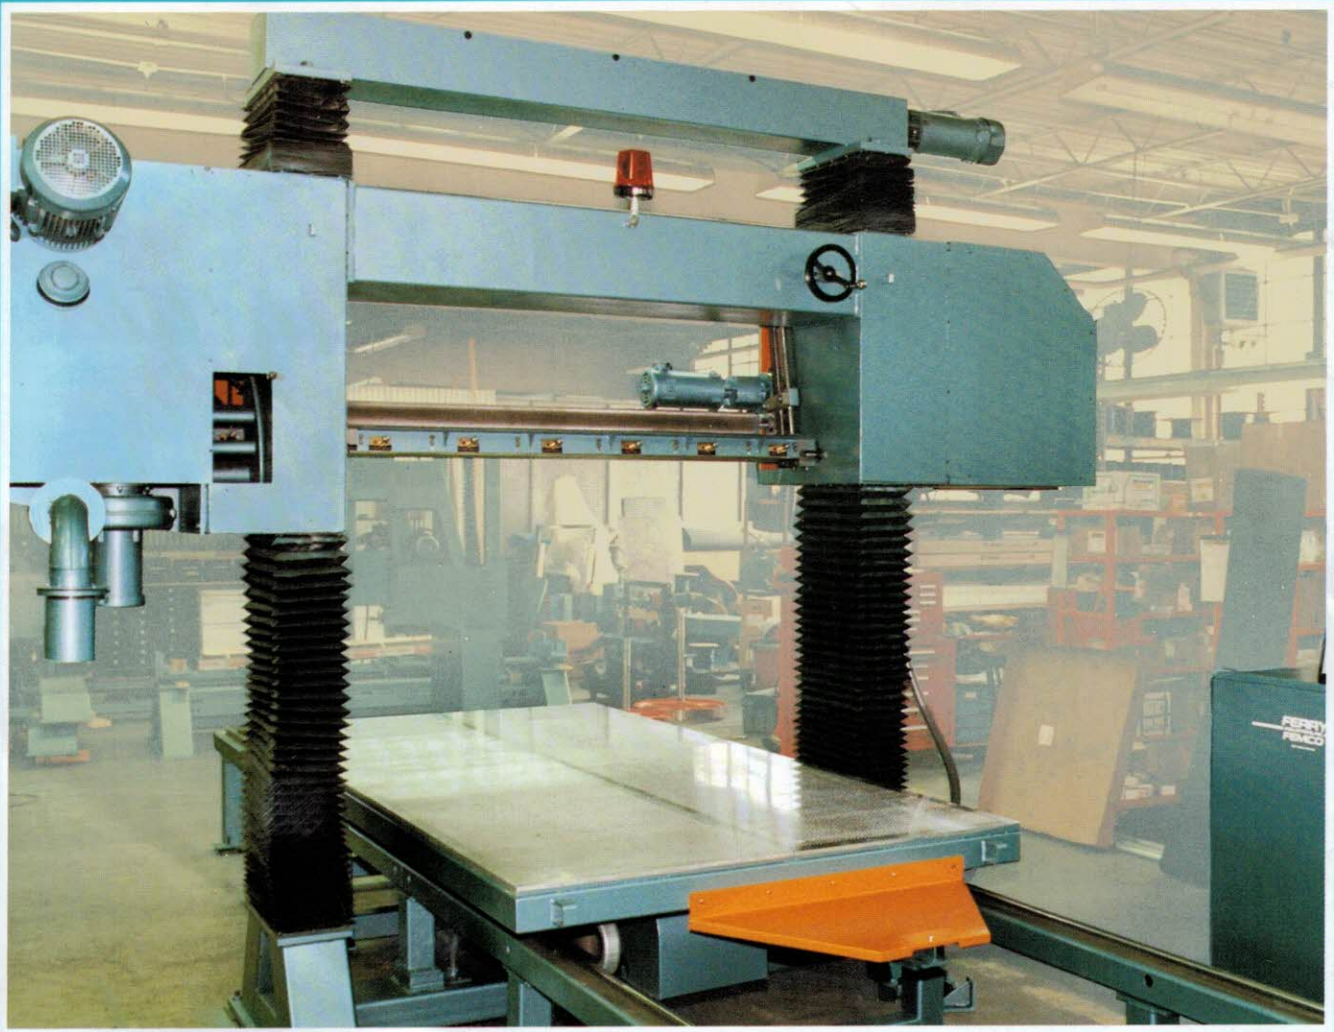


Photo courtesy of FERRY INDUSTRIES INC.

**FERRY INDUSTRIES INC.**